

## 1W OEM 802.11b/g/n Serial/Ethernet WIFI Router w/LTE

The pX2LTE-4GL combines our powerful px2 WiFi router/gateway and a robust LTE Connection into a single compact OEM package. The LTE Connection provides a wide selection of globally supported LTE bands, features 3G/HSPA Fallback and can deliver up to 150 Mbps of download speeds. The embedded pX2 provides high power (1W), wide range, fast 802.11n WiFi access for remote devices to connect. The pX2LTE features Dual Ethernet Ports, Dual RS232, USB and GPS capabilities.

**802.11 b/g/n (1W) WiFi**

**150 Mbps LTE w/Fallback**

**Compact Size**


**Ethernet | Serial | USB**

**Industrial Temperature**

**AP | Client | Repeater Modes**

### pXLTE Features

- High Power WiFi (up to 1W) w/ Excellent Rx Sensitivity
- 802.11b/g/n WiFi , up to 150 Mbps data rate
- 150 Mbps (DL) 4G/LTE Operation w/Global Band Support
- Firewall with ACL Security, Port Forwarding
- Full Scale Access Point, Client & Repeater Modes
- Dual Serial /Console Ports (RS232)
- Dual 10/100 Ethernet Ports (LAN/WAN)
- Industrial grade operating temperature (-40°C to +85°C)
- Standalone GPS
- Administration via console, telnet, web browser
- Local and remote wireless firmware upgradable

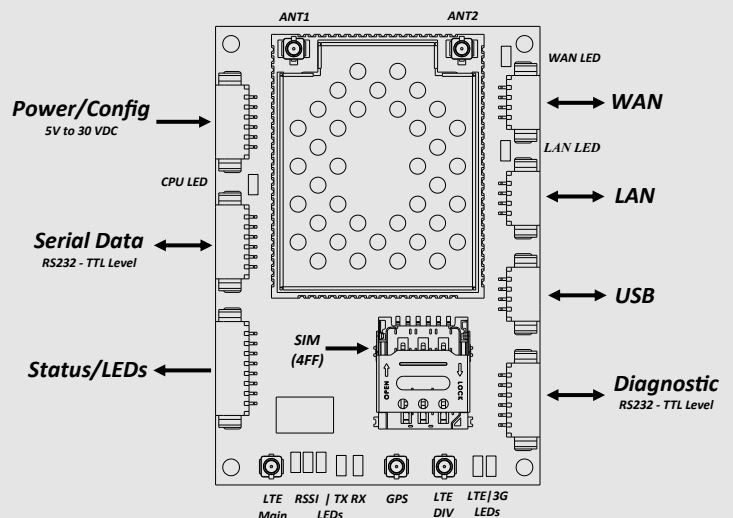

# pXLTE Series

# Specifications

WiFi Specifications		Performance Specifications (WiFi)			
<b>Frequency</b>	2.4000 - 2.4835 GHz	<b>Rate</b>	<b>Mode</b>	<b>Tx Power</b>	<b>Receive</b>
<b>Radio Operation</b>	IEEE 802.11 b/g/n	1 Mbps	802.11b	30 dBm	-97 dBm ±1 dB
<b>Output Power</b>	Up to 30dBm (1W)	2 Mbps	802.11b	30 dBm	-96 dBm ±1 dB
<b>Link Rate</b>	Up to 150 Mbps	5.5 Mbps	802.11b	30 dBm	-95 dBm ±1 dB
<b>Error Detection/Control</b>	FEC/ARQ	11 Mbps	802.11b	30 dBm	-92 dBm ±1 dB
<b>Operating Modes</b>	Full Scale Access Point, Client, Repeater	6 Mbps	802.11g	30 dBm	-94 dBm ±1 dB
<b>Encryption</b>	WEP,WPA(PSK), WPA2(PSK), WPA+WPA2(PSK), WPA Enterprise (RADIUS), WPA2 Enterprise, WPA + WPA2 Enterprise	9 Mbps	802.11g	30 dBm	-93 dBm ±1 dB
<b>Range</b>	> 10 miles (16 km) (Antenna Dependent)	12 Mbps	802.11g	30 dBm	-91 dBm ±1 dB
<b>Cellular Specifications</b>		18 Mbps	802.11g	30 dBm	-90 dBm ±1 dB
<b>Cellular Supported Bands</b>	LTE FDD: B1,B2,B3,B4,B5,B7,B8,B12,B13, B18,B19,B20,B26,B28 TDD: B38,B39,B40,B41 WCDMA: B1,B2,B4,B5,B8,B6,B19 GSM: B2/B3/B5/B8	24 Mbps	802.11g	28 dBm	-86 dBm ±1 dB
<b>Cellular Data Features*</b>	LTE FDD: Up to 150 Mbps DL, 50 Mbps UL LTE TDD: Up to 130 Mbps DL, 35 Mbps UL DC-HSPA+: Up to 42 Mbps DL, 5.7 Mbps UL WCDMA: Up to 384 Kbps DL, 384 Kbps UL EDGE: Up to 296 Kbps DL, 236.8 Kbps UL GSM: Up to 107 Kbps DL, 85.6 Kbps UL	36 Mbps	802.11g	28 dBm	-83 dBm ±1 dB
<i>*Module Standalone Lab Performance</i>		48 Mbps	802.11g	26 dBm	-77 dBm ±1 dB
<b>General Specifications</b>		54 Mbps	802.11g	26 dBm	-75 dBm ±1 dB
<b>Ports</b>	RS232 (Tx, RX, RTS, CTS, DTR, DSR) 300bps to 921kbps Dual 10/100BaseT IEEE802.3 2.0	MCS0	802.11n (HT20)	30 dBm	-96 dBm ±1 dB
<b>Management</b>	Local Serial Port Console, Telnet, WebUI, SNMP, FTP Upgrade, TFTP, CLI (Command Line Interface)	MCS1	802.11n (HT20)	30 dBm	-95 dBm ±1 dB
<b>Network Advanced Protocols</b>	TCP, UDP, TCP/IP, ARP, ICMP, DHCP, HTTP, SNMP, FTP, Serial over IP  IP Routing - static Routing, IP/RIPv1, IP/RIPv2, CIDR, ICMP, ARP NAT and Port Forwarding (Routing mode only).  Full 802.1Q VLAN Support, Access Control Lists (MAC & IP), MAC/IP Binding, Multiple SSID Support	MCS2	802.11n (HT20)	30 dBm	-92 dBm ±1 dB
<b>Diagnostics</b>	Remote Diagnostics, Monitor Utilities (Ping, ARP table, DHCP active leases, CCQ), Link Test	MCS3	802.11n (HT20)	28 dBm	-90 dBm ±1 dB
<b>Input Voltage</b>	7-30 VDC	MCS4	802.11n (HT20)	28 dBm	-86 dBm ±1 dB
<b>Connectors</b>	WiFi Antenna: UFL x2 (ANT1, ANT2) LTE Antenna: UFL x3 (Main, Div, GPS) Power: 6-Pin Quick Connect Serial/Console: 2x 6-Pin Quick Connect Status/LEDs: 8-Pin Quick Connect WAN/LAN: 2x 4-Pin Quick Connect USB: 4-Pin Quick Connect SIM Slot: Nano(4FF)	MCS5	802.11n (HT20)	26 dBm	-83 dBm ±1 dB
<b>Environmental</b>	Temperature: -40°F to 185°F (-40°C to +85°C) Humidity: 5-95% humidity, non-condensing	MCS6	802.11n (HT20)	26 dBm	-77 dBm ±1 dB
<b>Weight</b>	Modem: Approx. 30 grams Motherboard: 55 grams	MCS7	802.11n (HT20)	26 dBm	-75 dBm ±1 dB
<b>Dimensions</b>	Modem: 1.60" x 2.25" x 0.35" (40x57x9mm) Motherboard: 2.6" x 3.56" x 0.58" (70x90x14.5mm)	MCS0	802.11n (HT40)	30 dBm	-94 dBm ±1 dB
<b>Approvals</b>	FCC ISED Canada (Industry Canada) RoHS	MCS1	802.11n (HT40)	30 dBm	-93 dBm ±1 dB
		MCS2	802.11n (HT40)	30 dBm	-90 dBm ±1 dB
		MCS3	802.11n (HT40)	28 dBm	-89 dBm ±1 dB
		MCS4	802.11n (HT40)	28 dBm	-84 dBm ±1 dB
		MCS5	802.11n (HT40)	26 dBm	-81 dBm ±1 dB
		MCS6	802.11n (HT40)	26 dBm	-75 dBm ±1 dB
		MCS7	802.11n (HT40)	26 dBm	-73 dBm ±1 dB

## Order Options

Model pXLTE-4GL

## Contact Information

Microhard Systems Inc.  
150 Country Hills Landing N.W.  
Calgary, AB, Canada T3K 5P3

Email: [info@microhardcorp.com](mailto:info@microhardcorp.com)  
Tel: (403) 248-0028  
Fax: (403) 248-2762

Copyright 2022 Microhard Systems Inc.  
Specifications subject to change without notice.

